


1078 Operating I nstructions

With handle unlatched, insert jaws between discharge tube and baffle. The rubber piece of the jaw fits over the discharge tube.



After inserting jaws, fold handle up. This compresses rubber piece over discharge shutting off water.

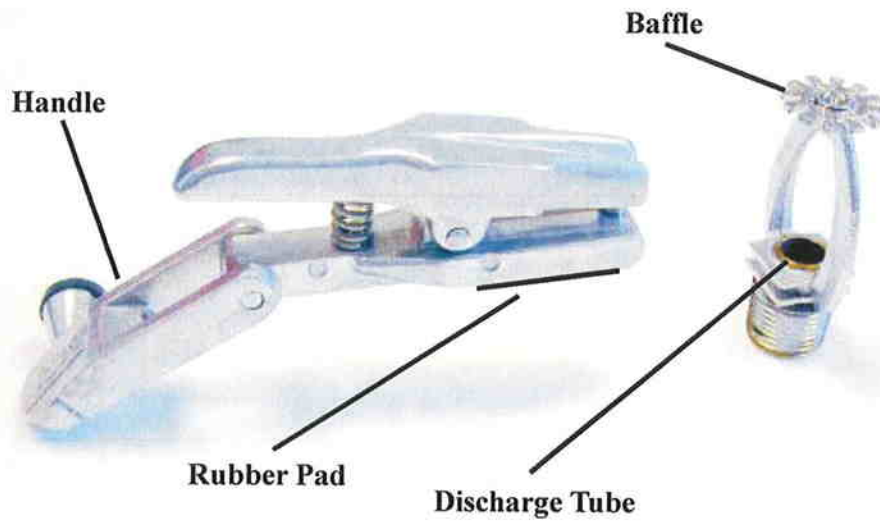