

PFP-23HPVGD-MR-CE

VANGUARD POWERED PRESSURE AND VOLUME PUMP

This pressure/volume pump is the most suitable for drop-in units. The engine and pump are mounted on a steel protective frame with folding handles.

Also available in skid version



ENGINE SPECIFICATIONS

- Vanguard, model 380000, air cooled engine
- V-Twin cylinder, 4-stroke gasoline engine
- Electric start with recoil start as backup
- 2.25 Gallons (8.5 L) integrated fuel tank

PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- One 1 1/2" (38mm) delivery outlet with Fire Type swing-out valve
- One 2 1/2" (65mm) suction inlet
- Dimensions: Length: 24 3/4" (630 mm); Width: 26 1/4" (667 mm); Height: 25 3/4" (654 mm);
- Wet weight: 185 lbs (84 kg)


INCLUDED ACCESSORIES

- Full control panel with pressure gauge, vacuum gauge, throttle, choke, starter, panel light and priming valve
- 16 Amps alternator
- Low oil alert
- 12-V battery

PERFORMANCE

MAX FLOW: 300 GPM
MAX PRESSURE: 225 PSI
265 GPM @ 50 PSI

195 GPM @ 100 PSI
150 GPM @ 150 PSI
80 GPM @ 200 PSI

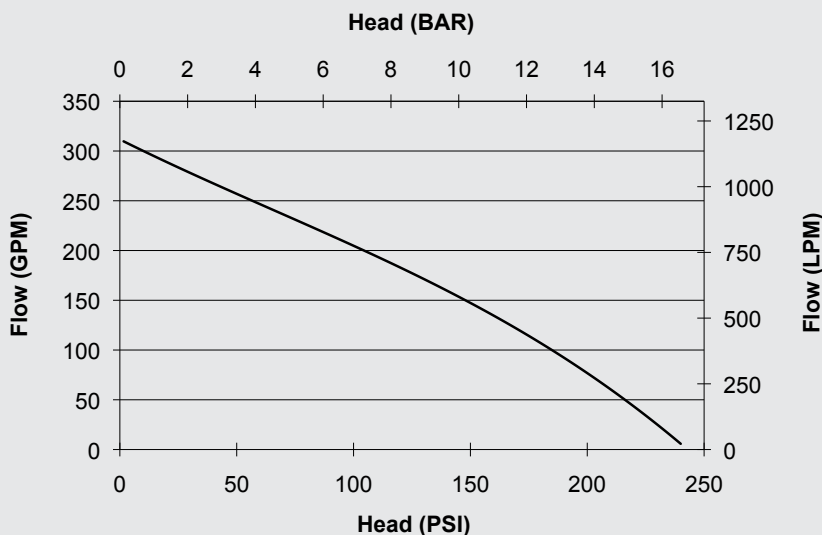

LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



**A CENTURY
OF ENGINEERING
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pumps.com