

ProTac® 1AA / ProTac® 2AA

HIGH PERFORMANCE ALKALINE FLASHLIGHT

MARKET
APPLICATIONS: Law Enforcement, Security, Emergency Medical Services, Sporting Goods, Hardware/Tool, Consumer

DESCRIPTION:

Compact & powerful, the ProTac® series flashlights offer three different user selectable programs and the latest in power LED technology. The combination of small size and output from the C4® LED result in one of the brightest tactical personal carry lights for its' size. Packaged with a removable pocket clip and holster. (Models also available with CR123A lithium cells.)

CASE MATERIAL:

6000 series machined aircraft aluminum with anodized finish. Available in Black.

DIMENSIONS:
ProTac® 1AA:
 Length: 4.16 in. (10.57 cm)
 Head Diameter: 0.90 in. (2.29 cm)
 Barrel Diameter: 0.65 in. (1.65 cm)

ProTac® 2AA:
 Length: 6.14 in (15.60 cm)
 Major Diameter: 0.90 in. (2.29 cm)
 Barrel Diameter: 0.65 in. (1.65 cm)

WEIGHT:
ProTac® 1AA: 2.3 oz (65 grams) with battery*

ProTac® 2AA: 3.4 oz (96 grams) with batteries*

LENS:

Glass lens, o-ring sealed.

LIGHT SOURCE:

C4® LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT:

See charts for specific model. Optimized electronics provides regulated intensity.

ON/OFF:

Multi-function, push-button tactical tailswitch. One handed operation of momentary, variable intensity or strobe mode. TEN-TAP® programmable switch allows user selection of one of three different programs: high/strobe/low (factory default), high only, or low/high.

RUN TIME:

See charts for specific model. All claims to 10% of initial lumen output.

BATTERY:
ProTac® 1AA: One (1) AA alkaline battery.
 Use of Lithium AA batteries will extend run time.

ProTac® 2AA: Two (2) AA alkaline batteries.

FEATURES:

 C4® LED technology for extreme brightness.
 LED Solid State Power Regulation provides maximum light output throughout battery life.
 IPX7 rated design; waterproof to 1 meter for 30 minutes.
 2 meter impact resistance tested.
 TEN-TAP® programmable switch allows user to select one of three different programs.
 Anti-roll facecap.
 Removable pocket clip.
 Serialized for positive identification.









WARRANTY:


Streamlight's Limited Lifetime Warranty.

APPROVALS:

 Meets applicable European Community directives. 
OPTIONAL
ACCESSORIES:

Holster.

	ProTac® 1AA			ProTac® 2AA		
	FL1 STANDARD	HIGH	LOW	FL1 STANDARD	HIGH	LOW
OUTPUT		70 LUMENS	5 LUMENS		250 LUMENS	18 LUMENS
RUNTIME		2h	32h		2h	43h
DISTANCE		76m	22m		130m	40m
INTENSITY		1,450cd	125cd		4,250cd	400cd
	1AA Strobe Runtime: 4 hours			2AA Strobe Runtime: 4 hours		

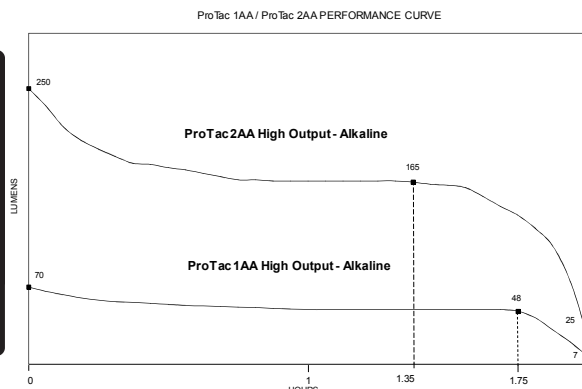

* Alkaline battery(s) included with purchase

All performance claims tested to ANSI/NEMA FL1-2009 Standard

Issued: 12/23/09

Revised: 11/03/16 Rev: 6

Made In China

Document #211