



## MITI Portable Decontamination Spray Hoops System



# MITI Portable Decontamination Spray Hoop

## Model DH-40

US PATENT #5,205,306

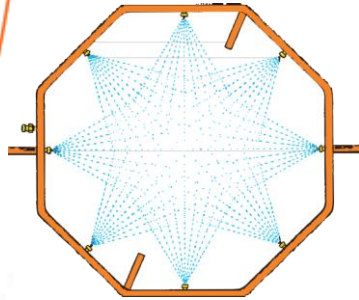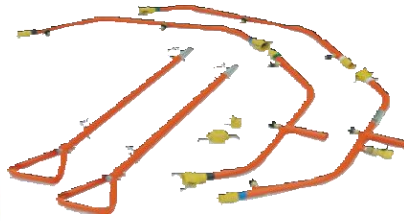

### Model DH40 DECON HOOP | 2 Piece With 2 Extendible Handles Can be used in Half or Full Hoop Configuration

**Water Output:** 4.6 GPM @ 30 PSI / 4.8 GPM @ 40 PSI  
(.29 Litres/Sec @30 PSI / .30 Litres/Sec @ 40 PSI)

**Assembled Size:** 45" OD X 39" ID, handles 43", Extended 66", 10LBS  
(114.30cm x 81.28cm ID, Handles 109cm, Extended 167cm, 4.55kg)

**Disassembled Size:** 5' Wide x 48" Length x 31" Height  
(12.70cm Wide x 121.92cm Length x 78.74cm Height)

#### Features

- ◆ Fast, Convenient, Cost-Efficient Decontamination
- ◆ Corrosion-free aluminum pipe and tube
- ◆ Durable, lightweight for rugged use, quick set-up on site.
- ◆ Features easy to use cam-lock couplings to join hoop halves
- ◆ Breaks down for easy storage and use for patient on backboard.
- ◆ Doubles as portable emergency shower for factories
- ◆ Uses a standard 3/4" hose connection
- ◆ Custom sizes available upon request
- ◆ \* Storage Bag & Lay Flat Hoses—Sold Separately

Manufactured By MITI



\* Storage Bag sold separately



Lay Flat Hoses sold separately

**APPLICATIONS: REMOVE SOOT EASILY • SELF WASH-OFF • AFTER FIRE CLEAN-UP EQUIPMENT • DECON**



POWERFULLY RINSE PERSONNEL AND EQUIPMENT



CLICK TO WATCH VIDEO ON




NAFECO  
2601 Beltline Rd SW  
Decatur, AL 35601

Customer Service: [info@nafeco.com](mailto:info@nafeco.com) Phone: 800-628-6233

# MITI Portable Decontamination U Shower

**Model DU-50**

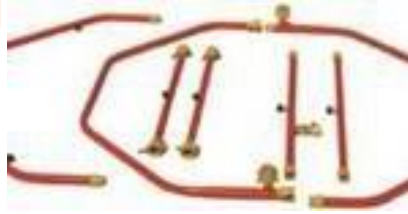

## Model DU-50 DECON PORTABLE SHOWER


**Water Output:** 6.3 GPM @ 30 PSI / 6.6 GPM @ 40 PSI  
(.39 Litres/Sec @30 PSI / .41 Litres/Sec @ 40 PSI)

**Assembled Size:** 52" Base Dia X 50" Shower Width x 7.5' Height, 29LBS  
(132.8cm Base Dia X 127cm Shower Width x 2.286m Height, 13.15KG)

**Disassembled Size:** 5' Wide x 54" Length x 30" Height, 29LBS  
(12.70cm Wide x 137.16cm Length x 76.20cm Height, 13.15KG)

### Features


- ◆ Fast, Convenient, Cost-Efficient Decontamination
- ◆ Corrosion-free aluminum pipe and tube
- ◆ Durable, lightweight for rugged use, quick set-up on site.
- ◆ Features easy to use cam-lock couplings to join hoop halves
- ◆ Breaks down for easy storage
- ◆ Emergency shower for factories
- ◆ Uses a standard 3/4" hose connection
- ◆ \* Storage Bag Included
- ◆ Lay Flat Hoses sold separately
- ◆ Custom sizes available upon request

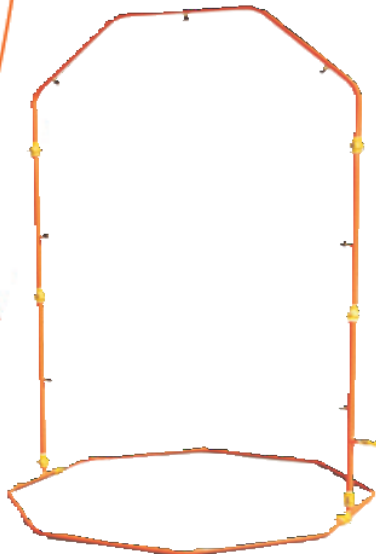

Manufactured By MITI



\* Storage Bag Included



Lay Flat Hoses sold separately

**APPLICATIONS: REMOVE SOOT EASILY • SELF WASH-OFF • AFTER FIRE CLEAN-UP EQUIPMENT • DECON**



CLICK TO WATCH VIDEO ON



NAFECO  
2601 Beltline Rd SW  
Decatur, AL 35601

**Customer Service:** [info@nafeco.com](mailto:info@nafeco.com) Phone: 800-628-6233

# MITI Portable PVC Hazmat Shower

## Model PVC-1

PVC-1



Manufactured By MITI

PVC-2



PVC-3



### Model PVC-1 PVC PORTABLE HAZMAT SHOWER

**Assembled Size:** 4'9" Base Dia X 4.9' Shower Width x 7.5' Height, 36LBS  
(149.36cm Base Dia X 149.36cm Shower Width x 2.286m Height, 16.33KG)

### Model PVC-2 MOLD & MILDEW RESISTANT TENT

**Details:** Tent fabric stores in 18" X 10" x 18" weight 18lbs  
(45.72 x 25.4 x 45.72 weight 39.68 kg)

### Model PVC-3 NON-INFLATABLE ROD WALL BERM

**Details:** 5' x 5' x 8" - 12lbs - **Folded Size:** 10" x 10" x 20" **Capacity:** 115 Gal  
(152.4 x 152.4 x 20.31 cm - Folded Size:25.40 x 25.40 x 50.80cm Capacity 435.32L)

### Features

- ◆ Designed using high quality rated schedule 80 PVC pipe
- ◆ Certified fittings designed to withstand 125PSI
- ◆ 12 spray nozzles to ensure 100% coverage
- ◆ Mold and mildew resistant
- ◆ Shower inserted directly in tent frame
- ◆ Hand-held hose for better cleaning
- ◆ Shower system can be used independently of the tent
- ◆ Frame is marked for quick easy assemble
- ◆ Replacement parts available
- ◆ Shower can be used from a fire hydrant with use of MITI Flow Reducer or from a garden hose
- ◆ Design can be used independently or with Mitico accessories such as containment berm, flow reducer, soap injector or any other MITI decontamination product
- ◆ Custom sizes available upon request

**APPLICATIONS: REMOVE SOOT EASILY • SELF WASH-OFF • AFTER FIRE CLEAN-UP EQUIPMENT • DECON**



NAFECO  
2601 Beltline Rd SW  
Decatur, AL 35601

**Customer Service:** [info@nafeco.com](mailto:info@nafeco.com) Phone: 800-628-6233

# MITI-FLOW Portable Inline Flow Regulator

## Model FR-150 & FR-250



Manufactured By MITI

The MITI-Flow In-Line Flow Regulator provides a means of assuring that pressures from the source do not exceed input requirements for DECON Wash Hoops, Showers, Heaters, Wands and other associated support equipment. The MITI In-Line Flow Regulator connects in-line to standard fire hose by NH Rocker Lug Connectors. The system incorporates a heavy-duty industrial flow reducing valve which is certified to 300psi, and automatically lowers the output pressure to 50psi operational pressure. Prevents fogging and minimizes water consumption and waste while protecting equipment. Ideal for both in-field and industrial use applications.

**Model FR-150** - HIGH PRESSURE FLOW REGULATOR, REDUCES PRESSURE UP TO 300PSI TO 50PSI (Adjusts 25-75PSI)  
1 1/2" FM ROCKER-LUG INLET / 1 1/2" M NH ROCKER-LUG CONNECTOR OUTLET—PRESET AT 50 PSI)


**Size:** 8" Width x 15.25" Length x 13.5" Height / Weight: 15.5 LBS

**Model FR-250** - HIGH PRESSURE FLOW REGULATOR, REDUCES PRESSURE UP TO 300PSI TO 50PSI (Adjusts 25-75PSI)  
2 1/2" FM ROCKER-LUG INLET / 2 1/2" M NH ROCKER-LUG CONNECTOR OUTLET—PRESET AT 50 PSI)

**Size:** 10" Width x 17" Length x 15" Height / Weight: 23.5 LBS  
(25.40 cm x 43.18 cm x 38.10 cm / Weight 7.03 kg)

#### Features:

- ◆ Housing constructed of heavy gauge, die-formed aluminum
- ◆ Tubular or reinforced rubber strap (depending on model) carry handle
- ◆ Rubber bumpers at base for stability
- ◆ Industrial pressure flow reducer certified to 300psi
- ◆ Rocker lug fire hose connectors for easy connection
- ◆ Design configurations for insertion in-line
- ◆ Reduces operating pressures automatically conserving water and lengthening equipment life
- ◆ Powder coated safety orange for high visibility and superior corrosion protection
- ◆ Light weight, highly portable
- ◆ Stows in small confined space

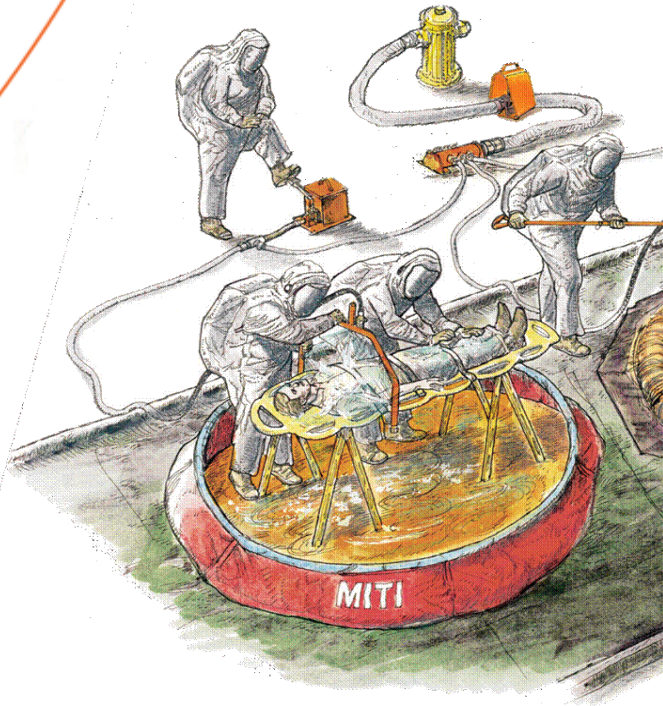

NAFECO  
2601 Beltline Rd SW  
Decatur, AL 35601

**Customer Service:** [info@nafeco.com](mailto:info@nafeco.com) Phone: 800-628-6233

# MITI Multi Manifold

## Model MM15 & MM25

US PATENT #D488,543

The multi manifold provides a means of quickly connecting standard 3/4" hose to hydrants, industrial fire systems, fire hoses or fire apparatus. It is constructed of heavy wall, corrosion-free aluminum pipe and fittings, and 500psi certified brass quarter-turn ball valves. Ideal for multiple hose connections, it can be used for many applications such as decontamination, overhaul and wild land fires. NOTE: NPH and other custom threads available upon request.

### Features

- ◆ More hoses, fewer parts
- ◆ Better water flow
- ◆ Stable, strong durable construction
- ◆ **Valve working pressures certified 0-500psi**
- ◆ Powder coated safety orange

MM15-3  
MM25-3



### Model MM15-3:

**Manifold with 1 1/2" FM NH Inlet Coupling with three (3) 1/4-turn one-way ball valves with threaded outlets.**

Size: 7.5" W x 12" L x 4.75" H Weight: 6lbs / (19.05 x 30.48 x 12.06 cm, 2.72kg)

### Model MM25-3:

**Manifold with 2 1/2" FM NH Inlet Coupling with three (3) 1/4-turn one-way ball valves with threaded outlets.**

Size: 7.5" W x 13" L x 4.75" H Weight: 7lbs / (19.05 x 33 x 12.06 cm, 3.17kg)

MM15-6  
MM25-6



### Model MM15-6:

**Manifold with 1 1/2" FM NH Inlet Coupling with six (6) 1/4-turn one-way ball valves with threaded outlets.**

Size: 9" W x 12" L x 4.75" H Weight: 8lbs / (22.86 x 30.48 x 12.06 cm, 3.62kg)

### Model MM25-6:

**Manifold with 2 1/2" FM NH Inlet Coupling with six (6) 1/4-turn one-way ball valves with threaded outlets.**

Size: 9" W x 13" L x 4.75" H Weight: 9lbs / (22.86 x 33.02 x 12.06 cm, 4.08kg)



NAFECO  
2601 Beltline Rd SW  
Decatur, AL 35601

Customer Service: [info@nafeco.com](mailto:info@nafeco.com) Phone: 800-628-6233

# MITI In-Line Multi Manifold

## Model MMIL2515-6 & MMIL2515-2



A DIVISION OF SEKURCORP


MITI's In-Line Multi-Manifold broadens the scope of Multi-Manifold use and application, and provides the ability for additional manifolds or other devices to be connected downline from the source, while simultaneously providing multiple 3/4" hose outlets in line. Applications include decontamination, overhaul, wild land fire, disaster and domestic emergency water supply.

### Features

- ◆ Corrosion-free hard coated heavy wall aluminum pipe and fittings.
- ◆ Fitting/adaptor provide for attachment to either 2 1/2" or 1 1/2" FM coupling or hose.
- ◆ Connects to source at hydrant/apparatus and multiple 3/4" hose.
- ◆ 500psi certified 1/4-turn brass ball valves.



MMIL2515-6

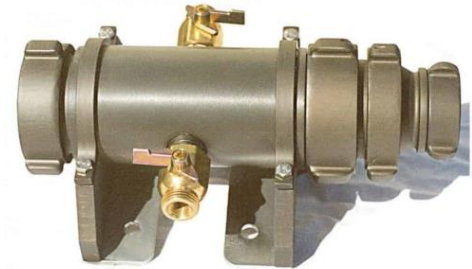

MMIL2515-2

### MMIL2515-6

2 1/2" Rocker-Lug Inlet/with 1 1/2" removable inlet adapter  
Outlet 2 1/2" Male NH with cap, (6) 1/4-turn, one way brass ball valves with threaded garden hose outlet

**Size:** 9" W x 15.5" L x 4.75" H

(22.86 x 39.37 x 12.07 cm), 10.5lbs/4.76 kg

### MMIL25-6

2 1/2" Rocker-Lug Inlet, Outlet 2 1/2" Male NH with cap,  
(6) 1/4-turn, one way brass ball valves with threaded garden hose outlet

**Size:** 9" W x 12.5" L x 4.75" W

(22.86 x 31.75 x 12.07 cm), 10.5 lbs/4.67 kg

### MMIL2515-2

2 1/2" Rocker-Lug Inlet/with 1 1/2" removable inlet adapter  
Outlet 2 1/2" Male NH with cap, (2) 1/4-turn, one way brass ball valves with threaded garden hose outlet

**Size:** 9" W x 12.5" L x 4.75" H

(22.86 x 31.75 x 12.07 cm), 7.75lbs/3.53 kg

### MMIL25-2

2 1/2" Rocker-Lug Inlet. Outlet 2 1/2" Male NH with cap,  
(2) 1/4-turn, one way brass ball valves with threaded garden hose outlet

**Size:** 9" W x 9.5" L x 4.75" H

(22.86 x 24.13 x 12.07 cm), 7 lbs/3.18 kg



NAFECO  
2601 Beltline Rd SW  
Decatur, AL 35601


Customer Service: [info@nafeco.com](mailto:info@nafeco.com) Phone: 800-628-6233

# MITI Adapter Fittings for In-Line Multi Manifold

## Model MMIL Adaptor Fittings



MMIL2515-6

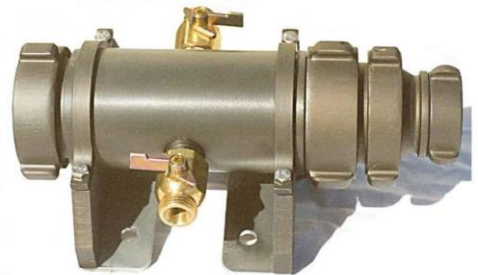

MMIL2515-2



MMIL2512OR

**MMIL2512OR** 2 1/2" to 1 1/2" Outlet reducer NH Male fitting/adaptor

**MMIL2525OC** 2 1/2" NH End Cap

**MMIL2515OC** 1 1/2" NH End Cap



MM2575OCV

**MM2575OCV** 2 1/2" NH End Cap 3/4" Male GHT x 1/4-turn Brass Ball Valve



MMIL2515IR

**MMIL2515IR** 2 1/2" to 1 1/2" Inlet reducer Rocker-Lug NH fitting/adaptor



MM25-2 WYE

**MM25-2 WYE** 2 each 1/4-turn high pressure Brass Ball Valves with 3/4" Garden Hose Male threaded fittings

**NOTE: NPH and other custom threads available upon request.**



NAFECO  
2601 Beltline Rd SW  
Decatur, AL 35601

Customer Service: [info@nafeco.com](mailto:info@nafeco.com) Phone: 800-628-6233



# MITI Portable High Pressure Soap Injector

## Model FSI-1

Manually operated, this system injects fluid soaps or decontamination agents in a controlled and regulated manner and only when needed. The injector overcomes supply line pressures to 1250 psi, allowing it to be placed at a distance from the decontamination area, in the cool zone, for maximum safety and control. Users maintain superior control over costly siphon systems. It provides multiple use capability for diverse applications, including personal apparatus, equipment, barrel and building wash-downs. Ideally suited for use with the MITI Portable Decon Wash Systems, it also works with other manufacturers' equipment.



### Features

- ◆ Manually operated, high pressure foot pump w/serrated foot treadle
- ◆ Two-and-a-half-gallon reservoir with quick-remove, gasketed lid
- ◆ Large fluid reservoir lid for quick, easy filling & level checking
- ◆ Cushioned feet for stability and prevention of liner punctures
- ◆ Dripless quick connectors prevent leaks when stored
- ◆ High pressure 3/8" fluid soap or decontamination agent supply line
- ◆ In-line brass "T" connector with male/female 3/4" garden hose connectors
- ◆ Powder coated for superior corrosion resistance, bright orange for visibility



FSI-1

### Specifications:

Capacity: 2 gallons (7.57 liters)

Overcome line pressures to 1250 lbs. (878.875kg/sq m)

Supply line hose: 3/8" x 10' feet (.95cm x 304.8cm)

Weight: 30 lbs (empty) (13.6kgs)

Size: 12" x 12" x 12" (30.5cm x 30.5cm x 30.5cm)

Manufactured By MITI



NAFECO  
2601 Beltline Rd SW  
Decatur, AL 35601

Customer Service: [info@nafeco.com](mailto:info@nafeco.com) Phone: 800-628-6233

# MITI Portable Diaphragm Hand Pump

## Model P-15



Provides quick emptying of decontamination pools, holding and drainage tanks, wells, etc. Removes high volumes of fluids in minutes. No need for electricity or combustion engines. Engineered and configured for quick setup and deployment. May be used at virtually any location. Components comprised of durable non-reactive materials. Ideal for use with both hazardous and non-hazardous materials.

### P-15 15GPM Diaphragm Hand Pump Kit (56.78 lpm) INCLUDES

- ◆ hand pump with female 1 1/2" Nyglass cam-loc inlet/outlet couplers and poly base mounting
- ◆ 10 ft. (3.05m) 1 1/2" inlet hose with male Nyglass quick couplers & Nitrile strainer
- ◆ 20 ft. (6.09m) 1 1/2" outlet hose with male Nyglass quickcouplers attached
- ◆ 15" x 1 1/2" x 4 1/2" (38.10 x 3.81 x 11.43 cm), 5lbs/2.67cm with hose, 15.5lbs/7.03 cm, output 15 GPM

### Ancillary Equipment



**P15AF-1515F** Fits male/male 1 1/2" hose coupler (Cam-loc "D" couplers both ends)



**P15AF-2X15** Barrel head adapter 2" threaded brass male barrel fitting with FM "D" cam-loc coupler for hose attachment



**P15AF-2X34** Barrel head adapter 2" threaded brass barrel fitting with 3/4" FMGHT swivel connector



**P15AF-112** Pair male "A" coupler to 3/4" male & FM GHT adapter for inlet & outlet of P-15 pump.



NAFECO  
2601 Beltline Rd SW  
Decatur, AL 35601

Customer Service: [info@nafeco.com](mailto:info@nafeco.com) Phone: 800-628-6233

# Totally Enclosed Decon Waste Tanks

## Model TEWT

These tanks are ideal for potable and non-potable storage situations and First Response wastewater storage/transport applications. Constructed of 28-oz PVC coated rip-stop woven fabric, they provide superior durability and long service life. Tanks have large filler opening with 4" cap. Floating filler ring collar keeps filler opening above fluid level at all times during filling. Outlet is configured with a 3" NPT FM thread with cap plug provided. Custom outlet configurations are available with special order.

TEWT-1200



### Totally Enclosed Decon Waste Tanks

**TEWT-110** 110 Gallon, 3' w x 5' l x 12" h 18lbs  
(400 ltrs, 91.44 x 152.40 x 30.48 cm 8.16kg)

**TEWT-150** 150 Gallon, 4' w x 5' l x 12" h 22lbs  
(570 ltrs, 121.92 x 152.40 x 30.48 cm 9.98kg)

**TEWT-300** 300 Gallon, 4' w x 6' l x 24" h 25lbs  
(1140 ltrs, 121.92 x 182.88 x 60.96 cm 11.34kg)

**TEWT-600** 600 Gallon, 5' w x 8' l x 24" h 50lbs  
(2300 ltrs, 152.40 x 243.84 x 60.96 cm 22.68kg)

**TEWT-1200** 1200 Gallon, 6' w x 12.5' l x 26" h 52lbs  
(4500 ltrs, 182.88 x 381.00 x 66.04 cm 23.59kg)

**TEWT-1800** 1800 Gallon, 7' w x 13.75' l x 30" h 70lbs  
(6800 ltrs, 213.36 x 420.62 x 76.20 cm 31.75kg)

**TEWT-2500** 2500 Gallon, 7' w x 18.06' l x 30" h 80lbs  
(9000 ltrs, 213.36 x 554.74 x 76.20 cm 36.29kg)

### Ancillary Equipment

**TEWT-BV15** 1/1" or 2" Ball Valve

**TEWT-SN1** PVC Carrying Case /Storage Bag

**TEWT-OC2** 2" or 3" NPT Outlet cap with Plug

**TEWT-OC4P** 4" NPT Outlet cap with plug

**TEWT-RK1** Repair Kit

**Note: When ordering, specify if for potable, non-potable or wastewater application.**



NAFECO  
2601 Beltline Rd SW  
Decatur, AL 35601

Customer Service: [info@nafeco.com](mailto:info@nafeco.com) Phone: 800-628-6233

# Inflatable Air Collar DeCon Wash/Waste Pool

## Model DPI



DPI-5/DPI-8

The MITI inflatable collar pool system combines a collapsible PVC-coated polyester pool featuring an inflatable collar with a 48" or 60" top opening. Carrying case is included.



### Inflatable collar DeCon waste pool

**DPI-5** 5' diameter x 13" high, (120 gal/450 liter) pool with case, 13 lbs (5.9) kg, 22-oz sidewall, 30-oz base, 3/4" GHT valve outlet

**DPI-8** 8' diameter x 13" high, (307 gal/1152 liter) pool with case, 22.5 lbs (10.21kg), 30-oz base, 3/4" GHT valve outlet



NAFECO  
2601 Beltline Rd SW  
Decatur, AL 35601

Customer Service: [info@nafeco.com](mailto:info@nafeco.com) Phone: 800-628-6233

# MITI Portable DeCon Waste Pools

## Model DP-6

### Self-Expanding Reinforced Sidewall (Airless) DeCon Wash/Waste Pool

Designed to be used in conjunction with MITI DeCon DH40 Series hoops, DU50 showers, and other similar DeCon equipment. Quick setup for on-site use. The pool is reusable, the liner disposable. Provides cost effective wastewater retention and containment. Unique design compresses for stowage and requires no air or water to inflate. MITI's Portable DeCon Pool System incorporates a durable and removable protective ground pad with permanently attached belts and quick couplers. This ground pad design enables the user to quickly attach the pool's wastewater retention ring. Once the ring is in place, the pool's disposable liner – made of polyethylene – is quickly and easily laid over the ring and tucked into place for use.




DP-6 Assembled

**DP-6** Decon Pool, re-usable, includes ground pad, retention hose and storage canister, 62" ID (157.48 cm) x 78" OD (198.12 cm) 85 gal / 322 liters capacity, 32 lbs (14.51 kg)

**DPL-66** Disposable pool liners, 10 mil, packaged 10 per case, size 10'x10' (304.80 x 304.80, 54 lbs / 24.49 kg) (Liners sold separately)



DPC-60 retention hose storage canister

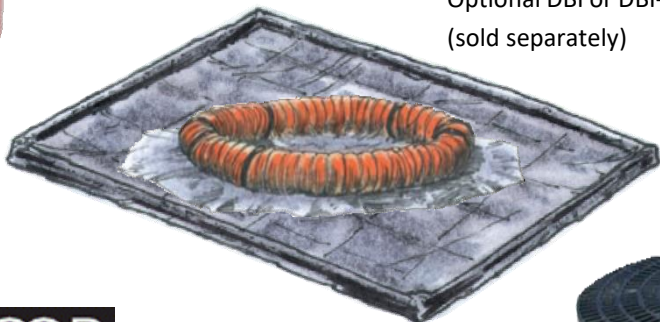


Optional DBI or DBI-HD Berm (sold separately)

DPL-66 Liner (sold separately)



Retention safety hose

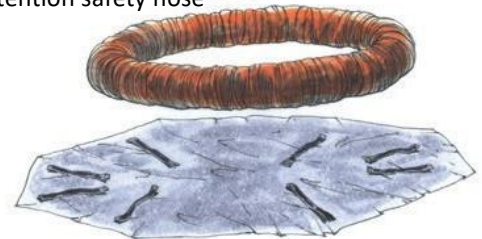

Ground Pad



DPRP Riser Grate



NAFECO  
2601 Beltline Rd SW  
Decatur, AL 35601

Customer Service: [info@nafeco.com](mailto:info@nafeco.com) Phone: 800-628-6233

# Non-Inflatable Rod Wall Berms

## Model RWB

### Cost effective solution for Primary and Secondary Containment

Durable, construction for rugged use. Design provides for quick deployment. Contains liquid hazardous material waste. Collects overspray created by the DeCon wash process. Folds into tight package to fit in confined space compartment.

CLICK TO WATCH VIDEO ON



### FEATURES

- ◆ Heavy duty black PVC-coated, woven polyester material
- ◆ One-piece, welded seam design
- ◆ Sidewalls supported by stainless steel "L" rod supports
- ◆ Side rod supports lay flat for folding & stowage
- ◆ Color stripe at top of berm for visual safety
- ◆ Outlet drain with male GHT shutoff
- ◆ Custom sizes available upon request
- ◆ **Stowage/carry bag optional - sold separately**
- ◆ Protective Ground Pad/Sheets sold separately. Review the Accessories section.

### Portable Primary or Secondary Rod Wall DeCon Containment Berms

Part #	Imperial	Metric
<b>RWB-58</b>	5' x 5' x 8" folded: 10" x 10" x 20" 115G 12lbs	12.70 x 12.70 x 20.32cm, folded: 25.40 x 25.40 x 50.80cm, 450L 5.44 kg
<b>RWB-512</b>	5' x 5' x 12" folded: 10" x 10" x 22" 185G 14lbs	12.70 x 12.70 x 30.48cm, folded: 25.40 x 25.40 x 55.88cm, 700L 6.35kg
<b>RWB-88</b>	8' x 8' x 8" folded: 12" x 12" x 24" 315G 25lbs	20.32 x 20.32 x 20.32cm, folded: 30.48 x 30.48 x 60.96cm, 1200L 11.34kg
<b>RWB-812</b>	8' x 8' x 12" folded: 12" x 12" x 26" 475G 29lbs	220.32 x 20.32 x 30.48cm, folded:30.48 x 30.48 x 66.04cm, 1800L 13.15kg
<b>RWB-148</b>	14' x 14' x 8" folded: 18" x 18" x 24" 975G 55lbs	35.56 x 35.56 x 20.32cm, folded:45.72 x 45.72 x 60.96cm, 3700L 24.95kg
<b>RWB-1412</b>	14' x 14' x 12" folded: 18" x 18" x 26" 1465G 60lbs	35.56 x 35.56 x 30.48cm, folded:45.72 x 45.72 x 66.04cm, 5550L 27.22kg
<b>RWB-10268</b>	10' x 26' x 8" folded: 20" x 20" x 30" 1295G 75lbs	25.40 x 66.04 x 20.32cm, folded:50.80 x 50.80 x 76.20cm, 4900L 34.02kg
<b>RWB-102612</b>	10' x 26' x 12" folded: 20" x 20" x 34 1945G 82lbs	25.40 x 66.04 x 30.48cm, folded:50.80 x 50.80 x 86.36cm, 7360L 37.18kg
<b>RWB-20208</b>	20' x 20' x 8" folded: 20" x 20" x 36" 1995G 110lbs	50.80 x 50.80 x 20.32cm, folded:50.80 x 50.80 x 91.44cm, 7550L 49.90kg
<b>RWB-202012</b>	20' x 20' x 12" folded: 20" x 20" x 38" 2990G 120lbs	50.80 x 50.80 x 30.48cm, folded:50.80 x 50.80 x 91.44cm, 11325L 54.43kg
<b>RWB-16408</b>	16' x 40' x 8" folded: 24" x 24" x 40" 3190G 170lbs	40.64 x 101.60 x 20.32cm, folded:60.96 x 60.96 x 101.60cm, 12000L 77.11kg
<b>RWB-164012</b>	16' x 40' x 12" folded: 24" x 24" x 44" 4785G 190lbs	40.64 x 101.60 x 30.48cm, folded:60.96 x 60.96 x 30.48cm, 18120L 81.18kg



NAFECO  
2601 Beltline Rd SW  
Decatur, AL 35601

Customer Service: [info@nafeco.com](mailto:info@nafeco.com) Phone: 800-628-6233

# Inflatable Sidewall Decon Containment Berms

## Model DBI

### Standard Duty Berm

These berms are designed to effectively contain the over spray from the DeCon activity. Constructed of durable 10-oz. polyethylene woven rip-stop fabric with sewn and sealed seams, the fabric is impervious to most chemicals and is water resistant. The side wall inflation tubes, which are replaceable, are constructed of 28-oz. heavy duty polyester fabric with PVC coating and are totally contained within the sidewalls. Inflation by SCBA, air cylinder, portable blowers, foot pump, etc.



### FEATURES

- ◆ 10-oz. polyethylene woven rip-stop fabric
- ◆ Sewn and sealed seams
- ◆ Impervious to most chemicals
- ◆ Water resistant
- ◆ 28-oz heavy-duty wall inflation tubes

### Secondary Inflatable Sidewall/Collar DeCon Containment Berms

Part #	Imperial	Metric
<b>DBI-1414</b>	14' x 14' x 7" depth 855G 55lbs	35.56 x 35.56 x 17.78 cm 3237L 24.95kg
<b>DBI-1426</b>	14' x 26' x 7" depth 1588G 72lbs	35.56 x 66.04 x 17.78 cm 6012L 32.66kg
<b>DBI-1640</b>	16' x 40' x 7" depth 2794G 112lbs	40.64 x 101.60 x 17.78 cm 10572L 50.80kg



NAFECO  
2601 Beltline Rd SW  
Decatur, AL 35601

Customer Service: [info@nafeco.com](mailto:info@nafeco.com) Phone: 800-628-6233

# Inflatable Sidewall Decon Containment Berms

## Model DBI

### Heavy Duty Berm

These berms are designed to effectively contain the over spray from the DeCon activity. Constructed of durable 32-oz. PVC-coated and woven rip-stop fabric with dielectric welded seams, the fabric is impervious to most chemicals and is water resistant. The side wall inflation tubes, which are replaceable, are constructed of 28-oz. heavy duty polyester fabric with PVC coating and are totally contained within the sidewalls. Inflation by SCBA, air cylinder, portable blowers, foot pump, etc.



DBI inflation ports



DBI inflation hose

### FEATURES

- ◆ 32-oz. PVC-coated woven rip-stop fabric
- ◆ Dielectric welded seams
- ◆ Impervious to most chemicals
- ◆ Water resistant
- ◆ 28-oz heavy-duty polyester fabric with PVC
- ◆ Inflatable

### Secondary Inflatable Sidewall/Collar DeCon Containment Berms

Part #	Imperial	Metric
<b>DBI-56-HD</b>	5' x 6' x 7" depth 44lbs 400G	152.40 x 182.88 x 17.78 cm 19.95kg 1500L
<b>DBI-1414-HD</b>	14' x 14' x 7" depth 65lbs 855G	35.56 x 35.56 x 17.78 cm 29.48kg 3237L
<b>DBI-1426-HD</b>	14' x 26' x 7" depth 84lbs 1588G	35.56 x 66.04 x 17.78 cm 38.10kg 6012L
<b>DBI-1640-HD</b>	16' x 40' x 7" depth 180lbs 2794G	40.64 x 101.60 x 17.78 cm 81.65kg 10572L



NAFECO  
2601 Beltline Rd SW  
Decatur, AL 35601

Customer Service: [info@nafeco.com](mailto:info@nafeco.com) Phone: 800-628-6233



# Ancillary DeCon Pool & Berm Equipment

## Model PGP & PVCGP

### PROTECTIVE GROUND PAD/SHEETS

Provides additional puncture and/or abrasion protection under pools and berms.



#### Protective Ground Pads / Sheets

10 oz. Protective Poly Ground Pad/Sheets w/Grommets on 48" Centers

Ideal for warm climates – stiffens in cold

Part #	Imperial	Metric
<b>PGP-1010</b>	10' x 10'	304.80 x 304.80 cm
<b>PGP-1414</b>	20' x 20'	609.60 c 609.60 cm
<b>PGP-1426</b>	20' x 32'	609.60 x 975.36 cm
<b>PGP-1640</b>	22' x 46'	670.56 x 1402.08 cm

18 oz. PVC Rip-Stop Material w/Grommets on 48" Centers

Ideal for cold and warm climates alike – retains flexibility in all climates

Part #	Imperial	Metric
<b>PVCGP-1010</b>	10' x 10'	304.80 x 304.80 cm
<b>PVCGP-1414</b>	20' x 20'	609.60 c 609.60 cm
<b>PVCGP-1426</b>	20' x 32'	609.60 x 975.36 cm
<b>PVCGP-1640</b>	22' x 46'	670.56 x 1402.08 cm



NAFECO  
2601 Beltline Rd SW  
Decatur, AL 35601

Customer Service: [info@nafeco.com](mailto:info@nafeco.com) Phone: 800-628-6233

# Portable Rigid Frame Quick Erect DeCon Shelter

## Model QES

The Portable Quick Erect Shelter is specifically designed for quick setup and deployment in virtually any geographical location. It is well suited for most environmental conditions. The Quick Erect Shelter can be deployed and used for virtually any type of application and need. The system is extremely cost effective, durable and lightweight. Sets up in 20-30 minutes with no tools or air supply required. Comes complete with storage bag, slip fit frame, and white 12oz fire retardant rip-stop material, which has a 690psi burst strength and is ultraviolet and mildew resistant. The translucent qualities of the skin material provide for a bright sunlit interior. The frame is constructed of 14-gauge galvanized steel tubing with slip fit ends for quick erection and disassembly. Unique ratchet skin tie-down system eliminates stress points and keeps the cover tight, lengthening the life of the skin.



DPI-5/DPI-8

### Quick Erect DeCon Shelter

#### QES-1014 10' W x 14' L x 11' H

Quick erect, slip fit, rigid frame shelter, folded with frame, cover, hardware, 2 vents, 1 window, 1 door  
1 bag @ 26 "diameter x 38" Length, (62.4 x 91.2 cm)  
2 bags @ 8" diameter x 60" Length, (19.2 x 144 cm)  
Total weight 150 lbs/68 kg

#### QES-1020 10' W x 20' L x 11' H

Quick erect, slip fit, rigid frame shelter, folded with frame, cover, hardware, 2 vents, 1 window, 1 door  
1 bag @ 26 "diameter x 38" length, (62.4 x 91.2 cm)  
2 bags @ 10" diameter x 60" length, (24.2 x 144 cm)  
Total weight 200 lbs/91 kg

#### QES-1025 10' W x 25' L x 11' H

Quick erect, slip fit, rigid frame shelter, folded with frame, cover, hardware, 2 vents, 1 window, 1 door  
1 bag @ 26 "diameter x 38" Length, (62.4 x 91.2 cm)  
2 bags @ 10" diameter x 60" Length, (24.2 x 144 cm)  
Total weight 250 lbs/113 kg

\*Optional fabric colors available  
\*Customizable with additional door, window or divider curtain.



NAFECO  
2601 Beltline Rd SW  
Decatur, AL 35601

Customer Service: [info@nafeco.com](mailto:info@nafeco.com) Phone: 800-628-6233