

PFP-18HPVGD-1D

GAS POWERED PUMP

This pressure/volume pump is the most suitable for drop-in units. The engine and pump are mounted on a steel protective frame with folding handles.



ENGINE SPECIFICATIONS

- Vanguard. model 3564, air cooled engine
- 2-cylinder, 4-stroke gasoline engine
- Electric start with recoil start as backup
- 6 gallon (22 l) detachable fuel tank

PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump
- Pump body made from high resistant aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Stainless steel pump shaft
- Exhaust priming system, guaranteed up to 20' (6 meter lift)
- One 2-½" (65mm) delivery outlet with Fire Type swing-out valve
- One 4" (100 mm) suction inlet
- Dimensions: Length: 27.5" (700 mm); Width: 22" (559 mm); Height: 24" (610 mm)
- Weight: 172 lbs (78 kg)

INCLUDED ACCESSORIES

- 16 Amps alternator
- 12-V Battery
- Pressure gauge


PERFORMANCE

390 GUSPM @ 25 PSI

310 GUSPM @ 50 PSI

130 GUSPM @ 100 PSI

45 GUSPM @ 125 PSI

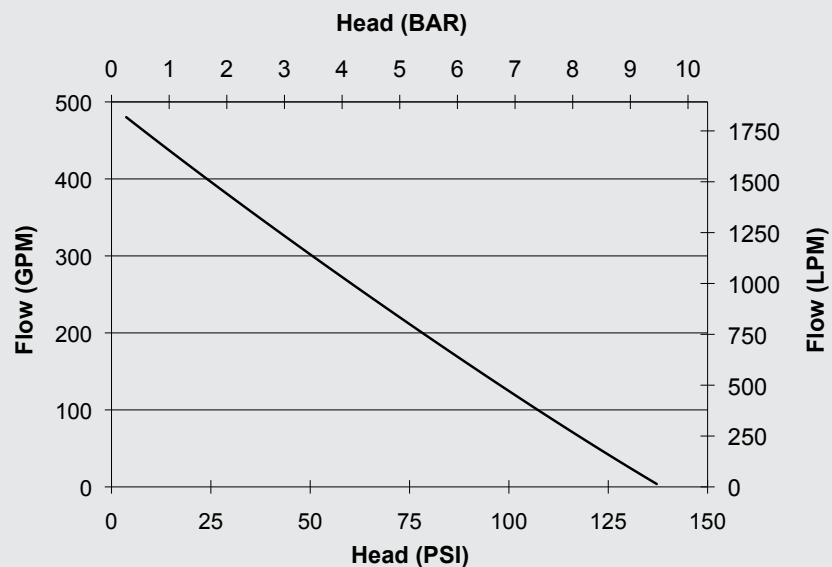

LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



**A CENTURY
OF ENGINEERING
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pumps.com