

PFP-20HPHND-MR

PRESSURE AND VOLUME PUMP

This pressure/volume pump is the most suitable for drop-in units. The engine and pump are mounted on a steel protective frame with folding handles.

Also available in skid version



ENGINE SPECIFICATIONS

- GX630 Honda air cooled engine
- V-Twin cylinder, 4-stroke gasoline engine
- Electric start
- 6 gallon (22 l) detachable fuel tank
- Charge coil 12V-17A

PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- One 1 1/2" (38 mm) delivery outlet with 1/4-turn ball valve
- One 2 1/2" (65 mm) suction inlet
- Dimensions: Length: 21 1/4" (540 mm)
Width: 26 1/2" (673 mm); Height: 24" (610 mm)
- Weight: 183 lbs (83 kg)


INCLUDED ACCESSORIES

- Low oil alert
- Pressure gauge
- 12-V battery

PERFORMANCE

MAX FLOW : 300 GPM
MAX PRESSURE : 205 PSI
240 GPM @ 50 PSI

180 GPM @ 100 PSI
125 GPM @ 150 PSI
60 GPM @ 200 PSI

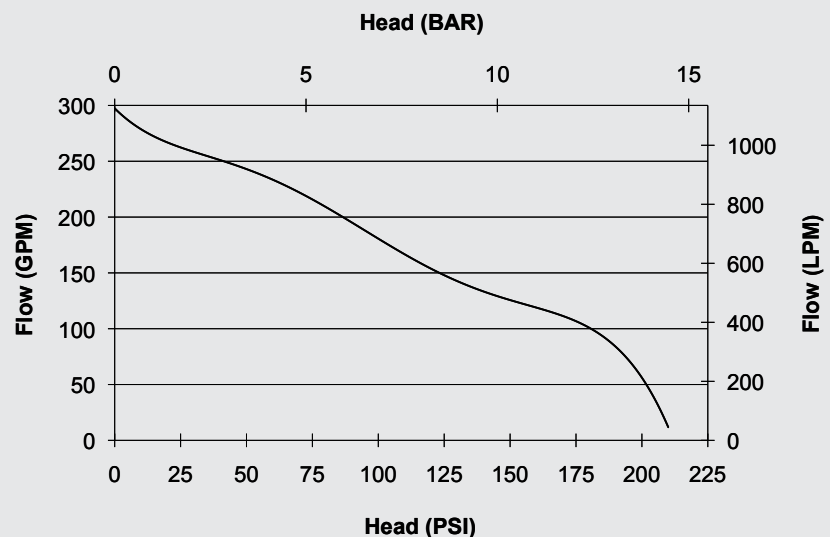

LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



**A CENTURY
OF ENGINEERING
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pumps.com