


# PFP-20HPKHL-MR

## PRESSURE AND VOLUME PUMP

*This pressure/volume pump is the most suitable for drop-in units. The engine and pump are mounted on a steel protective frame with folding handles.*

*Also available in skid version*

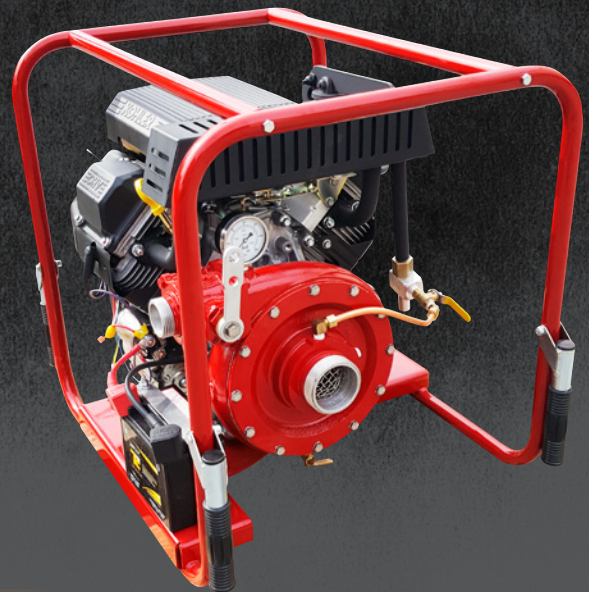

## ENGINE SPECIFICATIONS

- CH640 Kohler air cooled engine
- V-Twin cylinder, 4-stroke gasoline engine
- Electric start with recoil start as backup
- 6 gallon (22 l) detachable fuel tank
- 20 amp. charging, regulated

## PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- One 1 1/2" (38mm) delivery outlet with Fire Type swing-out valve
- One 2 1/2" (65mm) suction inlet
- Dimensions: Length: 27-1/2" (700 mm); Width: 22" (560mm); Height: 24" (610mm)
- Weight: 180 lbs (82 kg)


## INCLUDED ACCESSORIES

- Low oil alert
- Pressure gauge
- 12-V battery

## PERFORMANCE

**265 GPM @ 50 PSI**  
**190 GPM @ 100 PSI**

**140 GPM @ 150 PSI**  
**60 GPM @ 200 PSI**

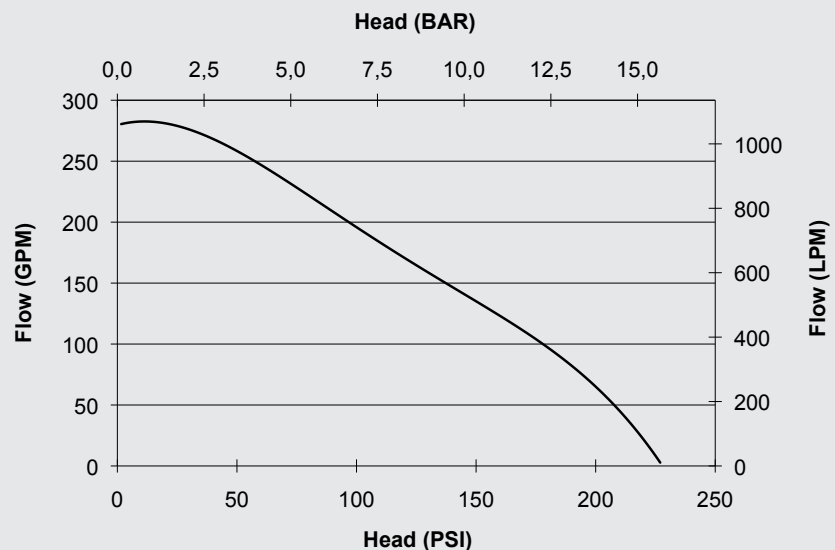

## LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



A CENTURY  
OF ENGINEERING  
FOR THE BRAVEST

75 Hector St., P.O. Box 90,  
Pierreville (Québec)  
Canada J0G 1J0  
Phone : 1-800-567-2719  
Fax : 1-800-434-2613  
[www.fire-pumps.com](http://www.fire-pumps.com)