

SM-PFP-25hp-DSL-MR

DIESEL POWERED PUMP

The MR version gives you more pressure to meet the requirements of an initial attack.

Also available in portable version



ENGINE SPECIFICATIONS

- D902 Kubota liquid cooled engine
- Alternator capacity: 12V-40A (480W)
- 3-cylinder, 4-stroke diesel engine
- Electric start

PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump
- Pump body made from high resistance aluminum alloy
- Bronze impellers
- Mechanical shaft seal
- Stainless steel pump shaft
- Electric priming system, guaranteed up to 20' (6 meter) lift
- One 1 1/2" (38mm) NPT-M delivery outlet flange
- One 2 1/2" (65mm) suction inlet
- Dimensions: Length: 29 1/2" (750 mm); Width: 26" (660 mm); Height: 33" (838 mm)
- Wet weight: 308 lbs (140 kg)


CONTROL PANEL

- Engine start/stop switch
- Throttle control lever
- Operating panel light
- Pilot lights
- Pressure gauge
- Vacuum pressure gauge
- Priming button

PERFORMANCE

315 GPM @ 10 PSI
300 GPM @ 50 PSI
230 GPM @ 100 PSI

145 GPM @ 150 PSI
105 GPM @ 175 PSI

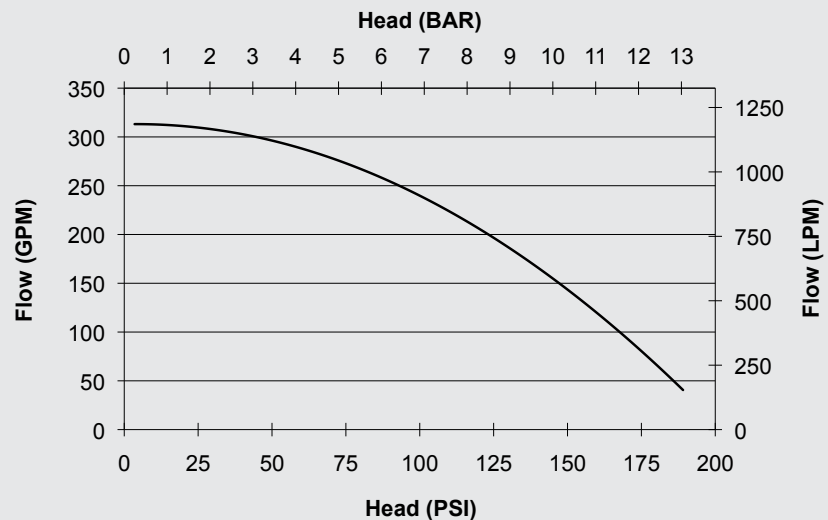

LIMITED WARRANTY


- 3 YEARS

INCLUDED ACCESSORIES

- Quick connect for 12-V battery



ACCEPT ONLY THE BEST



**A CENTURY
OF ENGINEERING
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pumps.com