


XPP-5410G Intrinsically Safe Permissible Penlight

| | |
|----------------------------|--|
| MARKET APPLICATIONS | Hazardous work environments, industrial, automotive, law enforcement, fire & rescue |
| DESCRIPTION | This non-rechargeable penlight is cETLus, ATEX, IECEx, MSHA and INMETRO listed Intrinsically Safe Permissible. It is ultra-compact and super slim with a powerful light output designed to illuminate very tight spaces. The tail-cap switch provides momentary or constant-on functionality. Power comes from 2 AAA premium batteries (included). |
| CASE MATERIAL | Engineered Polymer - Green |
| DIMENSIONS | Length: 5.8 inches (147 mm) • Head Diameter: 0.9 inches (23 mm) • Handle Diameter: 0.7 inches (18 mm) |
| WEIGHT | Weight: 1.9 oz. (54 g) with batteries installed |
| LENS | Unbreakable polycarbonate with scratch resistant coating |
| LIGHT SOURCE | Flashlight: CREE® LED Impervious to shock with a 50,000 hour lifetime |
| LIGHT OUTPUT | 30 lumens |
| ON/OFF | Single Tail-Cap Switch - Momentary or Constant-on Flashlight |
| RUN-TIME | 18 hours |
| BATTERY | 2 Premium alkaline AAA batteries (included) |
| FEATURES | <ul style="list-style-type: none"> • cETLus, ATEX, IECEx, MSHA and INMETRO listed Intrinsically Safe Permissible • CREE® LED technology – 50,000 + hours LED life • Momentary or constant-on flashlight • Sharp focused beam for illuminating tight spaces • Engineered polymer housing • Non-slip grip • Single body switch • Waterproof • Impact & chemical resistant • Built-in pocket/belt clip • Includes 2 premium AAA alkaline batteries |

XPP-5410 FLASHLIGHT PERFORMANCE CURVE

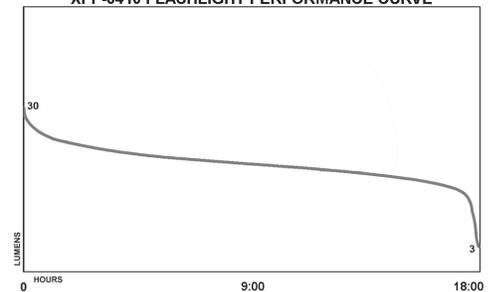

WARRANTY Limited Lifetime Warranty • Includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.

APPROVALS



| FL 1 STANDARD | | |
|---------------|--|--|
| | | |
| | | |

Permissible XPP-5410 Flashlight Assembly

MSHA APPROVAL No. 20-A140006-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: The Model XPP-5410 is MSHA approved for use with Energizer (Type E92), two Energizer (Type EN92), and Duracell (Type MX2400), Duracell (PC2400), and Duracell (EN92) batteries only. Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types. The Model XPP-5410 must not be opened in area where permissibility required.

| | | | | |
|----------|--|---|------|--|
| | ID 4001184 INTRINSICALLY SAFE SECURITE INTRINSEQUE | | 0359 | |
| Intertek | CLASS I DIV 1 GRPS A-D T3 CLASS II & III DIV 1 GRPS E-G T135C CLASS I ZONE 0 AEx ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga Ⓜ I M 1 Ex ia op is I Ma Ⓜ I 1 G Ex ia op is IIC T3 Ga | Ex ia op is I Ma Ex ia op is IIC T3 Ga Intertek ITS 13 ATEX27839X IECEx ITS 14.0036X -20°C ≤ Tamb ≤ +40°C 1.5V/Cell AAA Alkaline | | |

| | |
|--|--|
| Conforms to: ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11 ANSI/ISA 60079-26 | Certified to: CAN/CSA STD C22.2 No 157 CAN/CSA STD C22.2 No 60079-0 CAN/CSA STD C22.2 No 60079-11 CSA STD C22.2 No 25 |
|--|--|