

# PFP-11HPHND-EM-HP

## HONDA POWERED PUMP

High pressure Honda powered pump that goes up to 205 psi. Engine and pump are mounted on a protective frame made of steel with shock absorber and folding handles.

Also available in skid version



## ENGINE SPECIFICATIONS

- GX340 Honda air cooled engine
- Single cylinder, 4-stroke gasoline engine
- 12V electric start with recoil start as backup
- 1.6 gallon (6.1 l) integrated fuel tank

## PUMP UNIT SPECIFICATIONS

- Transmission drive C.E.T. single stage centrifugal pump
- Pump body made from resistant aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift.
- One 1 1/2" (38 mm) delivery outlet with 1/4-turn ball valve
- One 2 1/2" (65 mm) suction inlet
- Dimensions: Length: 24" (609 mm); Width: 26 3/4" (679 mm); Height: 23 7/8" (606 mm)
- Weight: 160 lbs (73 kg)


## INCLUDED ACCESSORIES

- 36 watts alternator
- Low oil alert
- Pressure gauge
- 12-V battery

## PERFORMANCE

125 GPM @ 10 PSI  
100 GPM @ 50 PSI  
65 GPM @ 100 PSI

35 GPM @ 150 PSI  
5 GPM @ 200 PSI

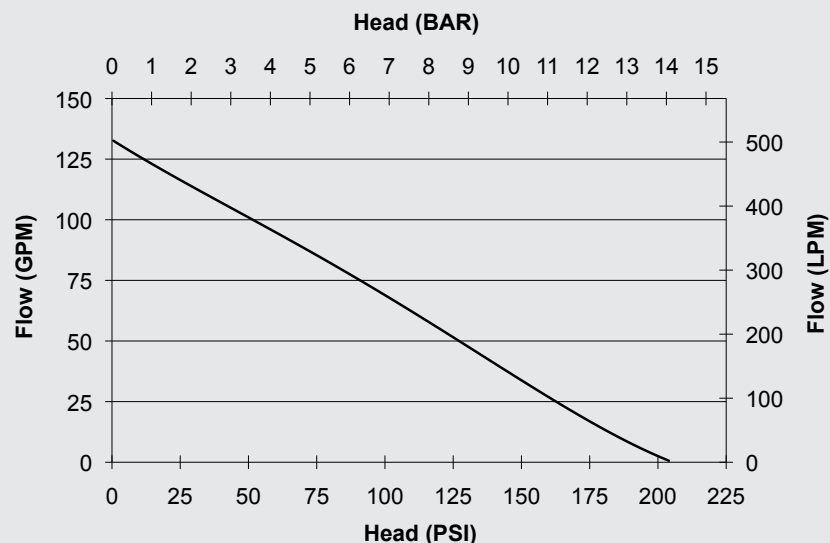


## LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



A CENTURY  
OF ENGINEERING  
FOR THE BRAVEST

75 Hector St., P.O. Box 90,  
Pierreville (Québec)  
Canada J0G 1J0  
Phone : 1-800-567-2719  
Fax : 1-800-434-2613  
[www.fire-pumps.com](http://www.fire-pumps.com)